

09/762713

JORDAN AND HAMBURG LLP
 122 East 42nd Street
 New York, NY 10168
 Tel: (212) 986-2340
 Fax: (212) 953-7733

Docket No. F-6818Date February 12, 2001


"EXPRESS MAIL" MAILING LABEL NO. EL 666239530US

DATE OF DEPOSIT February 12, 2000

I hereby certify that this paper or fee is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to the Assistant Commissioner for Patents, Washington, D. C. 20231.

Madeline Gonzalez

(Typed or printed name of person mailing paper or fee)



(Signature of person mailing paper or fee)

THE ASSISTANT COMMISSIONER FOR PATENTS
 Washington, D. C. 20231

[] ATTN: BOX PATENT APPLICATION

[X] ATTN: BOX PCT

[X] THIS IS THE NATIONAL STAGE OF PCT/EP99/05705 FILED August 6, 1999

Sir,

Transmitted herewith for filing is the [X] Utility [] Design patent application of:

Inventor/Application Identifier: **Klaus KRINNER et al.**

For: **DEVICE FOR FASTENING POLES, POSTS, MASTS OR THE LIKE IN THE GROUND, AND
 METHOD FOR MANUFACTURING A FASTENING DEVICE**

Enclosed are:

[X] 3 sheets of drawings ([X] formal [] informal size A4).[X] 19 pages of specification, including claims and abstract.[X] 22 total pages

[] Combined Declaration/Power of Attorney

[] Newly executed

[] Copy from prior application

[] Inventors deleted; see attached statement

[X] Inventor Information Sheet

[] Incorporation By Reference. The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein

[] Sequence Listing

[] Computer Readable Copy

[] Paper copy

[] The undersigned hereby affirms that the content of the paper and computer readable copies of the Sequence Listing are the same.

[] Cancel in this application original claims _____ of the prior application before calculating the filing fee.

CLAIMS FILED

For	Number Filed	Number Extra	Rate	Basic Fee	\$860.00
Total Claims	<u>54</u>	<u>34</u> (over 20) x	\$18.00	<u>612.00</u>	
Independent Claims	<u>4</u>	<u>1</u> (over 3) x	\$80.00	<u>80.00</u>	
[X] Multiple Dependent Claim			\$270.00	<u>270.00</u>	
[X] Reduce by 50% for Small Entity				<u>911.00</u>	
[] Foreign Language Filing Fee			\$130.00		
			TOTAL FILING FEE	<u>\$911.00</u>	
[X] Please charge Deposit Account No. 10-1250 in the amount of					<u>\$911.00</u>
A duplicate copy of this sheet is attached.					

[X] Please charge to Deposit Account No. 10-1250 any further fees under 37 CFR 1.16; 37 CFR 1.17; 37 CFR 1.492.

09/762713

JC02 Rec'd PCT/PTO 1 2 FEB 2001

- ☒ Return Receipt Postcard
- ☒ Preliminary Amendment
- ☐ Assignment to _____
- ☐ Assignment is of record in prior application Serial No. _____.
- ☐ Assignment Recordation Form Cover Sheet.
- ☐ Charge \$40.00 to Deposit Account No. 10-1250 for recording Assignment.
- ☐ Information Disclosure Statement and/or Information Disclosure Citation
- ☐ English translation
- ☒ Small Entity Status is asserted
- ☐ Applicant hereby claims the benefit of the filing date of the following provisional application(s) under the provisions of 35 USC 119.
- ☒ Applicant hereby claims the benefit of the filing date of the following applications under the provisions of 35 USC 119 of which certified copies ☐ will follow ☐ are enclosed ☒ have been filed in the International Bureau ☐ were filed in prior application No. _____.

German Appln. No. 19836370.2, filed August 11, 1998

- ☐ This is a ☐ Continuation ☐ Divisional ☐ Continuation-in-Part of prior application Serial No. _____.
- ☐ Amend the specification by inserting before the first line the sentence:
--This is a ☐ continuation, ☐ division, ☐ continuation-in-part, of application Serial No. _____, filed _____, --

JORDAN AND HAMBURG LLP

By 

C. Bruce Hamburg
Reg. No. 22,389
Attorney for Applicant

F-6818

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant : Klaus KRINNER et al.

Serial No. : Not yet known (U.S. National Stage of
PCT/EP99/05705 filed August 6, 1999)

For : DEVICE FOR FASTENING POLES, POSTS,
MASTS OR THE LIKE IN THE GROUND, AND
METHOD FOR MANUFACTURING A
FASTENING DEVICE

Assistant Commissioner for Patents
Washington, D.C. 20231

PRELIMINARY AMENDMENT

Sir:

Preliminary to examination, please amend the above-identified patent
application as follows:

IN THE TITLE:

Change the title to --DEVICE FOR FASTENING POLES, POSTS, MASTS
OR THE LIKE IN THE GROUND, AND METHOD FOR MANUFACTURING
A FASTENING DEVICE--.

F-6818

IN THE CLAIMS:

Amend claims 1-19 as follows:

1. (Amended) Method for manufacturing a device for fastening poles, posts, masts or the like in the ground, in particular a ground peg, with a basic body, at least one part portion of the basic body being provided with a screw-like or spiral-like thread for screwing into the ground and out of it again, and the basic body essentially having a cone-shaped basic shape with at least one conical part portion, wherein the basic body is hammered into the basic shape from an essentially cylindrical tube.

2. (Amended) Method for manufacturing a device for fastening poles, posts, masts or the like in the ground, in particular a ground peg, with a basic body, the basic body essentially having a cone-shaped basic shape with at least one conical part portion, wherein the basic body is hammered into the basic shape from an essentially cylindrical tube.

3. (Amended) Method according to Claim 2, wherein at least one fin-like surface element is attached to the basic body in its longitudinal direction.

4. (Amended) Method according to Claim 3, wherein three or four fin-like surface elements are attached in a circumferentially equiangularly spaced manner.

F-6818

5. (Amended) Method according to one of Claims 1 to 4, wherein the basic body, with a holding portion and with an anchoring portion, is hammered in one piece.

6. (Amended) Method according to one of Claims 1 to 4, wherein the basic shape of the basic body is designed as an anchoring portion, and a holding portion manufactured by means of a tube-end pressing method is attached thereto.

7. (Amended) Method according to one of Claims 1 to 4, wherein the basic body, with the anchoring portion and holding portion, is essentially hollow throughout.

8. (Amended) Method according to one of Claims 1 to 4, wherein the basic body has an anchoring portion and a bore is included in the basic body, at least in a lower, first part portion of the anchoring portion in the direction of insertion into the ground.

9. (Amended) Method according to Claim 5, wherein a tip is attached to the anchoring portion on the basic body.

10. (Amended) Device for fastening poles, posts, masts or the like in the ground, with a basic body which has an anchoring portion for anchoring in the ground and a holding portion for receiving the pole, post, mast or the like, the anchoring portion being designed as a cone-shaped, essentially acute-angled displacement body which has at least two part portions having different cone angles, and bearing at least in one of the two part portions a screw-shaped or spiral-shaped

F-6818

thread for screwing into the ground and out of it again, the second part portion following the first cone-shaped part portion in the screwing-in direction having a greater cone angle, wherein the anchoring portion is formed in one piece from a blank which is hammered from a cylindrical tubular part, and the holding portion and essentially the anchoring portion are hollow throughout.

11. (Amended) Fastening device according to Claim 10, wherein the thread extends essentially over the entire length of the anchoring portion.

12. (Amended) Device for fastening poles, posts, masts or the like in the ground, with a basic body which has an anchoring portion for anchoring in the ground and a holding portion for receiving the pole, post, mast or the like, the anchoring portion being designed as a cone-shaped, essentially acute-angled displacement body which has at least one cone-shaped part portion, wherein the anchoring portion is formed in one piece from a blank which is hammered from a cylindrical tubular part, and the holding portion and essentially the anchoring portion are hollow throughout.

13. (Amended) Fastening device according to Claim 12, wherein the basic body has at least one fin-like surface element in its longitudinal direction.

14. (Amended) Fastening device according to Claim 13, wherein three or four fin-like surface elements are attached to the circumference of the basic body at an essentially equal distance from one another.

F-6818

15. (Amended) Fastening device according to one of Claims 10 to 14, wherein the basic body, with the holding portion and the anchoring portion, is in one piece.

16. (Amended) Fastening device according to one of Claims 10 to 14, wherein the holding portion is attached to the anchoring portion.

17. (Amended) Fastening device according to one of Claims 10 to 14, wherein the difference in the cone angles of the first and the second part portions of the anchoring portion lies between 1 and 3 degrees.

18. (Amended) Fastening device according to one of Claims 10 to 14, wherein the anchoring portion has a bore in its lower, first part portion in the direction of insertion into the ground.

19. (Amended) Fastening device according to one of Claims 10 to 14, wherein the anchoring portion has a tip.

The Appendix hereto shows the changes in the claims.

REMARKS


This conforms, to the extent consistent with U.S. practice, the claims to an amendment filed in the international stage, amends the claim dependencies to eliminate the informality of any multiple dependent claim being dependent from

F-6818

any other multiple dependent claim, takes other steps toward conforming the claims
to U.S. practice and amends the title.

Respectfully submitted,

Jordan and Hamburg LLP

By 
C. Bruce Hamburg
Reg. No. 22,389
Attorney for Applicants

122 East 42nd Street
New York, New York 10168
(212) 986-2340

APPENDIX I

19. (Amended) Method for manufacturing a device for fastening poles, posts, masts or the like in the ground, in particular a ground peg, with a basic body, at least one part portion of the basic body being provided with a screw-like or spiral-like thread for screwing into the ground and out of it again, and the basic body essentially having a cone-shaped basic shape with at least one conical part portion, [characterized in that] wherein the basic body is hammered into the basic shape from an essentially cylindrical tube.

2. (Amended) Method for manufacturing a device for fastening poles, posts, masts or the like in the ground, in particular a ground peg, with a basic body, the basic body essentially having a cone-shaped basic shape with at least one conical part portion, [characterized in that] wherein the basic body is hammered into the basic shape from an essentially cylindrical tube.

3. (Amended) Method according to Claim 2, [characterized in that] wherein at least one fin-like surface element is attached[, in particular welded on,] to the basic body in its longitudinal direction.

4. (Amended) Method according to Claim 3, [characterized in that] wherein three or four fin-like surface elements are attached in a circumferentially equiangularly spaced manner.

F-6818

5. (Amended) Method according to one of Claims 1 to 4, [characterized in that] wherein the basic body, with a holding portion and with an anchoring portion, is hammered in one piece.

6. (Amended) Method according to one of Claims 1 to 4, wherein [5, characterized in that] the basic shape of the basic body is designed as an anchoring portion, and a holding portion manufactured by means of a tube-end pressing method is attached thereto[, in particular welded on].

7. (Amended) Method according to one of Claims 1 to 4, wherein [6, characterized in that] the basic body, with the anchoring portion and holding portion, is essentially hollow throughout.

8. (Amended) Method according to one of Claims [5 to 7, characterized in that] 1 to 4, wherein the basic body has an anchoring portion and a bore is included in the basic body, at least in a lower, first part portion of the anchoring portion in the direction of insertion into the ground.

9. (Amended) Method according to [one of Claims 5 to 8, characterized in that] Claim 5, wherein a tip is attached[, in particular pressed on,] to the anchoring portion on the basic body.

10. (Amended) Device for fastening poles, posts, masts or the like in the ground, with a basic body which has an anchoring portion for anchoring in the ground and a holding portion for receiving the pole, post, mast or the like, the anchoring portion being designed as a cone-shaped, essentially acute-angled

F-6818

displacement body which has at least two part portions having different cone angles, and bearing at least in one of the two part portions a screw-shaped or spiral-shaped thread for screwing into the ground and out of it again, the second part portion following the first cone-shaped part portion in the screwing-in direction having a greater cone angle, [characterized in that] wherein the anchoring portion is formed in one piece from a blank which is hammered from a cylindrical tubular part, and the holding portion and essentially the anchoring portion are hollow throughout.

11. (Amended) Fastening device according to Claim 10, [characterized in that] wherein the thread extends essentially over the entire length of the anchoring portion.

12. (Amended) Device for fastening poles, posts, masts or the like in the ground, with a basic body which has an anchoring portion for anchoring in the ground and a holding portion for receiving the pole, post, mast or the like, the anchoring portion being designed as a cone-shaped, essentially acute-angled displacement body which has at least one cone-shaped part portion, [characterized in that] wherein the anchoring portion is formed in one piece from a blank which is hammered from a cylindrical tubular part, and the holding portion and essentially the anchoring portion are hollow throughout.

13. (Amended) Fastening device according to Claim 12, [characterized in that] wherein the basic body has at least one fin-like surface element in its longitudinal direction.

F-6818

14. (Amended) Fastening device according to Claim 13, [characterized in that] wherein three or four fin-like surface elements are attached[, in particular welded on,] to the circumference of the basic body at an essentially equal distance from one another.

15. (Amended) Fastening device according to one of Claims 10 to 14, [characterized in that] wherein the basic body, with the holding portion and the anchoring portion, is in one piece.

16. (Amended) Fastening device according to one of Claims 10 to 14, [characterized in that] wherein the holding portion is attached[, in particular welded on,] to the anchoring portion.

17. (Amended) Fastening device according to one of Claims 10 to 14, wherein [16, characterized in that] the difference in the cone angles of the first and the second part portions of the anchoring portion lies between 1 and 3 degrees.

18. (Amended) Fastening device according to one of Claims 10 to 14, wherein [17, characterized in that] the anchoring portion has a bore in its lower, first part portion in the direction of insertion into the ground.

19. (Amended) Fastening device according to one of Claims 10 to 14, wherein [18, characterized in that] the anchoring portion has a tip[, in particular a square tip].

3/PRTS

09/762713

JC02 Rec'd PCT/PTO 1 2 FEB 2001

DEVICE FOR FASTENING POLES, POSTS, MASTS OR
THE LIKE IN THE GROUND, AND METHOD FOR
MANUFACTURING A FASTENING DEVICE

The invention relates to a device for fastening poles, posts, masts or the like in the ground and a method for manufacturing a fastening device.

Fastening devices for poles, posts, masts or the like for driving or screwing into the ground are in most cases manufactured by metal casting or welding together individual prefabricated shaped parts. In this connection, the manufacture of parts by casting or milling is relatively complicated and costly, and the manufacture of shaped parts does not allow 100% utilization of the starting material, which likewise contributes to increasing the cost of manufacture. In addition, the joints, at which the individual shaped parts are welded, adhesively bonded or pressed together, may bring about a weakening of the stability of the basic bodies of the corresponding fastening devices.

A fastening device is known from German Utility Model 93 13 258.1. This has a threaded portion, which can be screwed into the ground and out of it again, and a holding portion for receiving the pole, post, mast or the like, a cone-shaped displacement body for the earth material, which is active when the fastening device is screwed in, being arranged between the threaded portion and the holding portion. The threaded portion is a cast part and bears a spiral-shaped thread. The adjacent displacement body is shaped like a truncated circular cone and is essentially hollow and is, on the side of its smaller diameter, welded to the essentially cylindrical or slightly conical solid core of the threaded portion. The cone angle of the truncated circular cone-shaped displacement body is in this case distinctly greater than the angle of the threaded portion. The threaded portion and the displacement body form the anchoring portion of the fastening device.

As the fastening device, and in particular the anchoring portion, according to German Utility Model 93 13 258.1 is made up of a number of parts welded together, problems of strength may arise in particular in the region of the connection between the threaded portion and the displacement portion during screwing-in and out or in the event of forces acting on the fastening device. Moreover, the threaded portion of the anchoring portion, which is in the form of a cast part with a solid core, requires the use of a great deal of material.

Another fastening device is described in German patent specification 40 02 830. This fastening device has a threaded portion which can be screwed into the ground and out of it again and, at its rear end seen in the screwing-in direction, a holding portion for receiving the pole, post or the like. The threaded portion, which is designed as the anchoring portion, is of corkscrew-like or screw-like design and has a conical core which tapers steeply in the screwing-in direction. The relatively obtuse cone angle, which remains constant over the entire anchoring portion, makes screwing the fastening device into the ground more difficult on account of radial forces which arise, and, owing to the cone shape, does not allow secure anchoring of the fastening device in the ground because forces, such as those caused by shaking movements, arising radially on account of the obtuse cone angle, lead to the anchoring portion being loosened from the ground.

The fastening device according to German patent specification 40 02 830 consists of plastic material, which requires manufacture by laminating, hot-forming, injection moulding etc. These processes are relatively cost-intensive and thus expensive on account of the necessary preliminary work. While it is true that an anchoring portion manufactured in this way does not have any stability-reducing joints, it nevertheless has to be made from solid material in order to achieve the stability required.

The object of the invention is therefore to provide a fastening device for poles, posts, masts or the like for driving or screwing into the ground, which, essentially under all conditions and with the use of as little material as possible, affords great stability and thus allows secure anchoring in the ground and also affords safe and easy handling during driving-in or screwing into and out of the ground. Another object of the invention is to provide a method for manufacturing such a device for fastening poles, posts, masts or the like in the ground, in particular for manufacturing a ground peg with a basic body, which method is inexpensive in the manufacture of a basic body of a fastening device and requires the use of a small amount of material.

The object is achieved according to the invention by a method for manufacturing a fastening device according to Claim 1 or 2 and by a fastening device with the features according to Claim 8 or 10.

Expedient developments are defined in the respective dependent claims.

To manufacture a device for fastening poles, posts, masts or the like in the ground, in particular a ground peg, and in particular to manufacture a fastening device according to the present invention with a basic body, it being possible, but not essential, for at least one part portion of the basic body to be provided with a screw-like or spiral-like thread, and the basic body essentially having a cone-shaped basic shape with at least one conical part portion, the basic body is hammered, forged or worked into the basic shape from an essentially cylindrical tube. If desired, the screw-shaped or spiral-shaped thread can then be attached to the basic body at least in one part portion, in particular by welding on a correspondingly prefabricated shaped part. The basic shape of the basic body can be designed in an essentially acute-angled and

cone-shaped manner as an anchoring portion, which makes possible easy driving-in or screwing-in.

The hammering into shape of an essentially cylindrical tube to manufacture a basic body of a fastening device according to the invention affords the advantage that the deforming forces acting on the cylindrical tube are introduced into the tube both axially and radially by shaping hammer parts running axially around the tube, as a result of which relatively great deformation of the tube can be achieved. In contrast, when the tube is pressed into shape by axial pressing-in in a die, only axial forces act on the tube, by means of which the tube could be upset. The tube-hammering method according to the invention for cone-shaped basic shapes of a basic body of a fastening device is consequently particularly reliable and safe.

The tube-hammering method as such is known for other purposes and will therefore not be described in greater detail below. Other suitable methods with similar force action on the tube are also possible, in particular forging, working or the like, for manufacturing the basic shape of a ground peg. In this connection, the tube can additionally be partly heated in order to facilitate deformation. Using these methods, tubes can theoretically be deformed into a tip. This is also possible in the manufacture according to the invention of fastening devices. In particular, using this method, it is especially possible to form the desired essentially cone-shaped basic shape which is in particular acute-angled.

As the method according to the invention for manufacturing a fastening device is a non-cutting method, virtually 100% utilization of the starting material used, that is to say of the essentially cylindrical tube used, is achieved. By deforming the tube into an essentially cone-shaped basic shape, the hammering operation causes the wall thickness to increase with a

smaller diameter of the basic body, while the cavity in the tube is essentially preserved. In addition to the fact that the basic body, in particular the anchoring portion, can be essentially hollow-formed as a unit, that is to say in particular in one piece, the enlargement of the wall thickness is especially advantageous because the stability of the basic body and thus of the fastening device which can be achieved is consequently greater than in the case of fastening devices which have to be assembled and welded together from a number of individual parts.

Another advantage consists in that the method is less labour-intensive and is thus cost-effective because of the absence of any jointing or assembly steps.

In the method for manufacturing a basic body of a fastening device, it is especially advantageous to form the basic body in one piece with a holding portion and an anchoring portion. This results in further strengthened stability of the whole fastening device.

In another preferred embodiment of the method for manufacturing a basic body of a fastening device, it is advantageous to design the basic shape of the basic body as a one-piece anchoring portion and to attach, in particular to weld on, thereto the holding portion which is essentially in the form of a sleeve and manufactured by means of a tube-end pressing method. Any other suitable connection technique is likewise possible. The attachment of an initially separately manufactured holding portion part allows greater flexibility in the design of the fastening device, for example in consideration of different insertion parts for the holding portion.

In another preferred embodiment of the invention, it is especially advantageous that the basic body, with the anchoring portion and holding portion, is essentially hollow throughout, as a result of which the manufacturing costs can be further reduced on account of the saving of material, and the weight of the basic body also remains low.

In an especially preferred embodiment of the method for manufacturing a fastening device, the basic body is provided with a bore through its wall at least in a lower, first part portion seen in the direction of insertion into the ground. Through this bore, which communicates in particular with the essentially hollow anchoring portion, any standing water in the fastening device can drain off relatively easily because, on the one hand, the high water column above the bore builds up a relatively high water pressure and, on the other hand, the deep position of the bore in the ground means that gravelly soil may already be reached, which allows water to seep away more readily than the humus at the surface. It may perhaps even be appropriate to moisten the ground during the driving-in or screwing-in operation by means of water which is introduced into the anchoring portion from above and can then escape via the bore, which can further ease driving-in or screwing-in, in addition to the cone shape of the anchoring portion, which is optimized according to the invention.

Especially advantageous is an embodiment of the method, in which the essentially cylindrical tube is reduced to a diameter of roughly 10 mm, and a square tip is attached, in particular pressed on, to this cylindrical piece. Such a tip has proved to be especially advantageous because it has great stability during driving-in or screwing-in and displaces small stones and hard layers of earth especially well. Conically shaped tips or cutting-tool tips or drill bits are also possible.

In an advantageous embodiment of the method, in the event that no thread is provided, at least one fin-like surface element is attached in a suitable manner, in particular welded on, to the basic body essentially in its longitudinal direction. Especially advantageous is the attachment of three or four fin-like surface elements spaced equiangularly over the circumference. The surface

elements can be stamped, cast, milled or manufactured in another suitable manner. By attaching the surface element(s), additional stability and good guidance can be achieved, in particular when the fastening device is driven in.

The fastening device according to the invention with a basic body, which can be manufactured in particular by means of the method described above, has an anchoring portion for anchoring in the ground and a holding portion for receiving the pole, post, mast or the like. The anchoring portion is designed as a cone-shaped, essentially acute-angled displacement body which has at least one cone-shaped part portion. There may also be two, three or four part portions of different conicity. At least one part portion of the displacement body can bear a screw-shaped or spiral-shaped thread for screwing into the ground and out of it again, but this is not essential. If the fastening device is intended for driving into the ground, the thread is omitted. The first cone-shaped part portion of the displacement body in the direction of insertion into the ground has a more acute cone angle than the second cone-shaped part portion following it. Any further following portions can have any cone angle, small or large. According to the invention, the anchoring portion is formed in one piece from a hollow blank, in particular from an essentially cylindrical tube. Furthermore, according to the invention, the holding portion and essentially the anchoring portion are hollow throughout.

A suitable material for the fastening device according to the invention is in particular metal, in particular with appropriate anti-corrosion treatment.

The anchoring portion is preferably closed on the first portion in the direction of insertion into the ground. The closure can be brought about by compression of the material of the essentially cylindrical tube.

According to the invention, the anchoring portion and the holding portion are essentially hollow throughout, which, in addition to a saving in terms of material and thus cost and reduced weight, also results in the advantage that the holding portion and the anchoring portion or displacement body can serve to receive the ground end of a pole, post or the like to be erected using the fastening device, the ground end of this pole or post or the like undergoing positional fixing in particular in the horizontal plane by means of the essentially acute-angled conical inner surface of the portions or part regions of the portions, and already being clamped in a self-locking manner by the radially acting forces.

As the anchoring portion is designed essentially over its entire length as a cone-shaped, essentially acute-angled displacement body for the earth material, the fastening device is braced in the ground during driving or screwing into the latter, as earth material and stones are displaced according to the essentially acute displacement body angle over the entire cone length. As a result of this, the forces displacing the earth material and any stones are greater than in fastening devices which displace the earth material essentially only in a relatively obtuse-angled displacement body region between a threaded portion and the holding portion. Consequently, driving-in or screwing-in is made easier. The advantage over a cone angle which remains constant throughout over the entire anchoring portion consists in that a smaller cone angle makes the placing and alignment of the fastening device in the ground easier at the start of screwing-in and keeps the effort required during driving-in or screwing-in low.

As, according to the invention, at least the anchoring portion is formed in one piece from a blank, and there are consequently no joints between different component parts in this region, improved stability of the anchoring portion and of the fastening device is achieved in comparison

with the prior art.

It is especially advantageous if the anchoring portion and the holding portion are formed in one piece so as to increase further the stability of the whole device.

In another embodiment of the fastening device, the holding portion is attached, in particular welded on, as a shaped part as described further above to the anchoring portion. Any other suitable connection technique is likewise possible. The essentially sleeve-shaped holding portion can then be adapted especially well to different sizes of poles, posts, masts or the like to be inserted. Such an essentially sleeve-shaped holding portion advantageously consists of five portions. The first portion forms a cone for centring in the anchoring portion of the basic body formed into the basic shape. The second portion is designed as a hexagon for transmission, if appropriate, of a rotary movement by means of a hexagon socket screw key. The third portion is designed as a cylindrical portion and establishes the distance between the first portion and the top portion of the anchoring portion. The fourth portion affords the possibility of receiving any fixing and positioning aids in the holding portion, and the fifth portion offers the possibility of clamping the poles, posts, masts to be fastened or positioning and fixing devices in the holding portion.

In general, the fastening device according to the invention, or the basic body manufactured according to the invention, offers the possibility of allowing, in the holding portion, fixing of the objects to be fastened or of the optionally additionally used positioning devices.

In a preferred embodiment of the fastening device according to the invention, the at least two part portions of the anchoring portion have a small difference in the cone angle in the range

of 1 to 3 degrees. Any differences in the cone angle between other part portions can have the same angular range but can also be greater.

According to the invention, the thread is arranged in such a manner that at least one part portion of the anchoring portion or of the displacement body bears a screw-shaped or spiral-shaped thread.

However, it is especially preferred if the thread extends essentially over the entire length of the anchoring portion. It can then extend over all or some of the individual cone-shaped portions. The thread is attached, in particular welded on, as a shaped part to the basic shape of the basic body of the anchoring portion.

The drawing-in forces of the corresponding thread are then defined by the size of the active surface on the thread turn. As the whole anchoring portion is of cone-shaped design, that is to say as the diameter of the thread-bearing regions of the anchoring portion increases, the thread diameter and thus the active surface on the thread turn also increase. After screwing of the threaded portion into the ground has been completed, two opposite forces act in the whole fastening device seen in the axial direction, namely a force built up by the threaded portion, which force acts so as to draw the fastening device still further into the ground, and an opposite force built up by the anchoring portion through the compacted earth material. These two forces acting in opposite directions brace the fastening device or its anchoring portion in the ground.

As a result of the essentially acute-angled design of the anchoring portion or of the displacement body and the small cone angle differences preferred according to the invention between the at least two part regions of different conicity, not only is driving-in or screwing-in made easier, but, on account of the uniform compaction over the entire length, secure fixing of

the fastening device is also achieved, which can be used optimally in particular with the thread extending essentially over the entire length of the anchoring portion.

In an advantageous embodiment of the fastening device, in the event that no thread is provided, at least one fin-like surface element is attached in a suitable manner, in particular welded on, to the smooth basic body essentially in its longitudinal direction. Especially advantageous is the attachment of three or four fin-like surface elements spaced equiangularly over the circumference. The fin-like surface elements extend at least over one part portion of the anchoring portion and project essentially radially from the basic body. Surface elements which are non-planar and/or arranged at a radial and/or axial angle are also possible at least in part regions.

By attaching the fin-like surface element(s), additional stability can be achieved, in particular when the fastening device is driven in. They also provide improved directional guidance during driving-in. As the active lateral surface of the anchoring portion in the ground is enlarged by the fin-like surface elements, the fastening device can take up and dissipate greater lateral forces. This offers in particular additional protection against twisting.

In another preferred embodiment of the invention, the essentially hollow anchoring portion has a bore in its lower part portion, that is to say in the first cone-shaped part portion in the direction of insertion into the ground. The water exchange with deeper ground layers already described above is possible via this bore through the wall of the anchoring portion.

In the case of the fastening device with a thread for screwing into the ground, it is preferred to provide on the anchoring portion or the displacement body and/or on the holding portion at least one point of application for a tool for applying the screwing movement to the

threaded portion. In an especially preferred embodiment, the point of application is formed by two bores, which are offset by 180° in relation to one another and lie essentially in a horizontal plane, for receiving a turning handle. Accordingly, in order to screw the fastening device according to the invention, or its anchoring or threaded portion, into the ground, all that is necessary is to guide a handle, for example an appropriately dimensioned bar or the like, through the two aligned bores, after which this bar can be used to increase the torque to be applied to the threaded portion.

In the case of the fastening device without a thread for driving-in, it may likewise be preferred if the device has the bores described above. This makes it possible for a handle, for example an appropriately dimensioned bar or the like, to be guided through the two aligned bores, after which this bar serves for pushing-in and/or to support the driving of the fastening device into the ground.

The invention is described in greater detail below with reference to exemplary embodiments shown in the appended drawings, in which:

Fig. 1 shows a side view of a first preferred embodiment with a thread of the fastening device according to the invention,

Fig. 2 shows a side view of a second preferred embodiment with a thread of the fastening device according to the invention, and

Fig. 3 shows a side view of a preferred embodiment without a thread of the fastening device according to the invention.

Figures 1 and 2 show two preferred embodiments of the fastening device according to the invention with a thread for screwing into the ground and out of it again. All details relating to

these two figures, with the exception of those which concern the thread, can also apply for the fastening devices according to the invention without a thread for driving into the ground.

Fig. 1 shows a first preferred embodiment of the fastening device according to the invention with a thread.

The fastening device has a basic body 1 with an anchoring portion 2 and a holding portion 3, the anchoring portion 2 and the holding portion 3 being formed in one piece. The anchoring portion 2 is designed as an essentially acute-angled displacement body and is divided into two part portions of different conicity, the first cone-shaped part portion in the screwing-in direction having a more acute cone angle than the second conical part portion in the screwing-in direction. The first conical part portion bears a thread 4. A tip 5 is applied to the first conical part portion. Moreover, the first cone-shaped part portion has a bore 6 which extends through the wall of the basic body 1 to the cavity of the essentially hollow basic body 1.

According to the invention, the two cone-shaped part portions of the basic body are hammered into its cone-shaped basic shape from an essentially cylindrical tube.

The holding portion has two bores (one of these can be seen in Fig. 1) which serve to receive a turning handle for screwing the fastening device into the ground.

Fig. 2 shows a second preferred embodiment of the fastening device according to the invention with a thread, or of the basic body of the fastening device according to the invention with a thread.

The basic body 1 of the fastening device is designed as an anchoring portion which has been hammered into the basic shape. The anchoring portion 2 has two part portions of different conicity, the lower cone-shaped part portion, the first in the screwing-in direction, having a more

acute cone angle than the second conical part portion in the screwing-in direction. In this embodiment, the thread 4 extends over both cone-shaped part portions. An essentially sleeve-shaped holding portion 3 manufactured by means of a tube-end pressing method has been attached, or welded on, to the basic shape of the basic body, which is designed as the anchoring portion 2. The basic body 1 thus formed is essentially hollow. The hollow interior is (in the other drawings also) indicated by the dashed lines. Located in the lower region of the basic body 1 is a bore 6 which extends through the wall of the basic body 1 to the hollow inner region of the basic body 1. Pressed onto the first conical part region, in the screwing-in direction, of the anchoring portion of the basic body, which is designed as a displacement body, is a square tip 5. The holding region 3 is divided into five portions: a first cone-shaped portion for centring and fastening in the anchoring portion, a second hexagonal portion for transmission of a rotary movement by means of a hexagonal socket screw key in order thus, for example, to screw the fastening device into and out of the ground, a third cylindrical portion, a fourth conical portion for receiving any required or desired positioning and fixing devices in the holding portion 3, and a fifth portion which can serve for clamping the objects to be fixed.

The essentially sleeve-shaped holding portion 3 has been manufactured by means of an essentially known tube-end pressing method.

Fig. 3 shows a preferred embodiment of the fastening device without a thread.

The basic body 1 is formed in one piece with an anchoring portion 2 and a holding portion 3. In this case, it has no thread. The anchoring portion 2 has two regions of different conicity. However, a different number of part portions, but at least one conical part portion, can be present. Pressed onto the lower portion, the first in the direction of driving into the ground, is

a square tip 5.

The anchoring portion 2 and the holding portion 3 are hammered from a tube so as to be essentially hollow throughout. The bottom portion of the anchoring portion is compressed by hammering to such an extent that it no longer has a hollow interior. In the lower portion, at a suitable height, the holding portion has a bore 6 which extends through the wall of the basic body 1 to its hollow interior. Two fin-like surface elements 7 are attached to the outer surface of the anchoring portion 2 in its longitudinal direction. These elements extend essentially radially away from the anchoring portion and, on their side facing the anchoring portion, follow the contour of the cone-shaped portions. The surface elements do not extend as far as the tip 5 or as far as the bottom portion of the anchoring body. However, this is also possible. The surface shape of the surface elements 7, or the contour of their narrow sides facing away from the anchoring portion, is optional. However, the area is limited by the fact that the ease of handling of the fastening device is to remain guaranteed, in particular during placing and driving-in. Variation of the surface shape and/or of the area allows adaptation to different types of use, types of ground and force action, and in particular optimum protection against twisting of the fastening device.

CLAIMS

1. Method for manufacturing a device for fastening poles, posts, masts or the like in the ground, in particular a ground peg, with a basic body, at least one part portion of the basic body being provided with a screw-like or spiral-like thread for screwing into the ground and out of it again, and the basic body essentially having a cone-shaped basic shape with at least one conical part portion, characterized in that the basic body is hammered into the basic shape from an essentially cylindrical tube.
2. Method for manufacturing a device for fastening poles, posts, masts or the like in the ground, in particular a ground peg, with a basic body, the basic body essentially having a cone-shaped basic shape with at least one conical part portion, characterized in that the basic body is hammered into the basic shape from an essentially cylindrical tube.
3. Method according to Claim 2, characterized in that at least one fin-like surface element is attached, in particular welded on, to the basic body in its longitudinal direction.
4. Method according to Claim 3, characterized in that three or four fin-like surface elements are attached in a circumferentially equiangularly spaced manner.
5. Method according to one of Claims 1 to 4, characterized in that the basic body, with a holding portion and with an anchoring portion, is hammered in one piece.
6. Method according to one of Claims 1 to 5, characterized in that the basic shape of the basic body is designed as an anchoring portion, and a holding portion manufactured by means of a tube-end pressing method is attached thereto, in particular welded on.
7. Method according to one of Claims 1 to 6, characterized in that the basic body, with the

anchoring portion and holding portion, is essentially hollow throughout.

8. Method according to one of Claims 5 to 7, characterized in that a bore is included in the basic body, at least in a lower, first part portion of the anchoring portion in the direction of insertion into the ground.

9. Method according to one of Claims 5 to 8, characterized in that a tip is attached, in particular pressed on, to the anchoring portion on the basic body.

10. Device for fastening poles, posts, masts or the like in the ground, with a basic body which has an anchoring portion for anchoring in the ground and a holding portion for receiving the pole, post, mast or the like, the anchoring portion being designed as a cone-shaped, essentially acute-angled displacement body which has at least two part portions having different cone angles, and bearing at least in one of the two part portions a screw-shaped or spiral-shaped thread for screwing into the ground and out of it again, the second part portion following the first cone-shaped part portion in the screwing-in direction having a greater cone angle, characterized in that the anchoring portion is formed in one piece from a blank, and the holding portion and essentially the anchoring portion are hollow throughout.

11. Fastening device according to Claim 10, characterized in that the thread extends essentially over the entire length of the anchoring portion.

12. Device for fastening poles, posts, masts or the like in the ground, with a basic body which has an anchoring portion for anchoring in the ground and a holding portion for receiving the pole, post, mast or the like, the anchoring portion being designed as a cone-shaped, essentially acute-angled displacement body which has at least one cone-shaped part portion, characterized in that the anchoring portion is formed in one piece from a blank, and the holding portion and

essentially the anchoring portion are hollow throughout.

13. Fastening device according to Claim 12, characterized in that the basic body has at least one fin-like surface element in its longitudinal direction.

14. Fastening device according to Claim 13, characterized in that three or four fin-like surface elements are attached, in particular welded on, to the circumference of the basic body at an essentially equal distance from one another.

15. Fastening device according to one of Claims 10 to 14, characterized in that the basic body, with the holding portion and the anchoring portion, is in one piece.

16. Fastening device according to one of Claims 10 to 14, characterized in that the holding portion is attached, in particular welded on, to the anchoring portion.

17. Fastening device according to one of Claims 10 to 16, characterized in that the difference in the cone angles of the first and the second part portions of the anchoring portion lies between 1 and 3 degrees.

18. Fastening device according to one of Claims 10 to 17, characterized in that the anchoring portion has a bore in its lower, first part portion in the direction of insertion into the ground.

19. Fastening device according to one of Claims 10 to 18, characterized in that the anchoring portion has a tip, in particular a square tip.

ABSTRACT

A method for manufacturing a device for fastening poles, posts, masts or the like in the ground and a fastening device with a basic body are described, it being possible, but not essential, for at least one part portion of the basic body to be provided with a screw-like or spiral-like thread, and the basic body essentially having a cone-shaped basic shape with at least one conical part portion. According to the method of the invention, the basic body is hammered into the basic shape from an essentially cylindrical tube.

The fastening device has a holding portion, and an anchoring portion designed in one piece which, if provided with a thread, has at least two part portions of different conicity. The holding portion and essentially the anchoring portion are hollow throughout.

**COMBINED DECLARATION FOR PATENT APPLICATION AND
POWER OF ATTORNEY (Continued)**
(Includes Reference to PCT International Applications)

F-6818

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) or PCT international application(s) designating the United States of America that is/are listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in that/those prior application(s) in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, §1.56(a) which occurred between the filing date of the prior application(s) and the national or PCT international filing date of this application:

PRIOR U.S. APPLICATIONS OR PCT INTERNATIONAL APPLICATIONS DESIGNATING THE U.S. FOR BENEFIT UNDER 35 U.S.C. 120:					
U.S. APPLICATIONS			STATUS (Check One)		
U.S. Application Number	U. S. Filing Date		Patented	Pending	Abandoned
PCT APPLICATIONS DESIGNATING THE U.S.					
PCT Application No.	PCT Filing Date	U.S. Serial Numbers Assigned (if any)			

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith.


Frank J. Jordan Reg. No. 20,456
C. Bruce Hamburg Reg. No. 22,389
Herbert F. Ruschmann Reg. No. 35,341


Marvin Turken Reg. No. 18,330
Alfred D'Andrea Reg. No. 27,752

Send Correspondence To: Jordan and Hamburg LLP
122 East 42nd Street
New York, New York 10168

Direct Telephone Calls to:
C. Bruce Hamburg
(212) 986-2340

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

Full Name of Sole or First Inventor	Inventor's Signature	Date
<u>Klaus KRINNER</u>		<u>05.03.2001</u>
Residence		Citizenship
<u>Strasskirchen, Germany</u>	<u>DEX</u>	<u>Germany</u>
Post Office Address		
<u>Blumenthal 19, 94342 Strasskirchen, Germany</u>		

Full Name of Second Joint Inventor, if any	Inventor's Signature	Date
<u>Guenter THURNER</u>		<u>05.03.2001</u>
Residence		Citizenship
<u>Strasskirchen, Germany</u>	<u>DEX</u>	<u>Germany</u>
Post Office Address		
<u>Irlbacher Strasse 9, 94342 Strasskirchen, Germany</u>		

COMBINED DECLARATION FOR PATENT APPLICATION AND POWER OF ATTORNEY

(Includes Reference to PCT International Applications)

Attorney's Docket Number

F-6818

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

DEVICE FOR FASTENING POLES, POSTS, MASTS OR THE LIKE IN THE GROUND, AND
METHOD FOR MANUFACTURING A FASTENING DEVICE

the specification of which (check only one item below):

☐ is attached hereto.

☐ was filed as United States application

Serial No. _____

on _____,

and was amended

on _____ (if applicable).

☒ was filed as PCT international application

Number PCT/EP99/05705

on August 6, 1999

and was amended under PCT Article 19

on _____ (if applicable).


I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the patentability of this application in accordance with Title 37, Code of Federal Regulations, §1.56(a).

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate or of any PCT international application(s) designating at least one country other than the United States of America listed below and have also identified below any foreign application(s) for patent or inventor's certificate or any PCT international application(s) designating at least one country other than the United States of America filed by me on the same subject matter having a filing date before that of the application(s) of which priority is claimed:

PRIOR FOREIGN/PCT APPLICATION(S) AND ANY PRIORITY CLAIMS UNDER 35 U.S.C. 119:			
Country (if PCT indicate "PCT")	Application Number	Date of Filing (day, month, year)	Priority Claimed Under 35 USC 119
Germany	198 36 370.2	11. August 1998	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> No
			<input type="checkbox"/> Yes <input type="checkbox"/> No
			<input type="checkbox"/> Yes <input type="checkbox"/> No

United States Patent & Trademark Office
Office of Initial Patent Examination -- Scanning Division

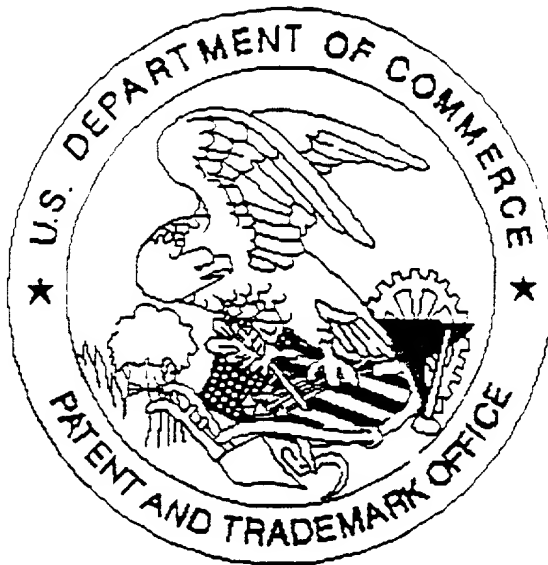

Application deficiencies were found during scanning:

☒ Page(s) _____ of DRAWINGS were not present:
for scanning. (Document title)

☐ Page(s) _____ of _____ were not present:
for scanning. (Document title)

☐ Scanned copy is best available.